



Industrial Packaging



Heavy duty cling film

Solution
Luban DFDA-7047/DFDA-7059

Polymer
LLDPE

Process
Blown/Cast Film, MFR 1/2 g/10 min,
Density 0.918 g/cc



Pallets

Solution
Luban DNDC-7150/D-
NDC-7152/LL-8446.21/
DMDA-8007/EP2340L

Polymer
LLDPE/HDPE/PP (ICF)

Process
Rotational Molding/Injection Molding,
MFR 3.5/5/8/6 g/10 min, Density
0.939/0.936/0.965/0.91 g/cc



Ropes

Solution
Luban HP5101R/HP1102K

Polymer
PP (Homo)

Process
Fiber and Filament/Raffia, MFT 24/3.4 g/10
min, Density 0.91 g/cc



Outdoor storage bins

Solution
Luban DNDC-7150/DNDC-7152/LL-8446.21

Polymer
LLDPE

Process
Rotational Molding, MFR 3.5/5 g/10 min,
Density 0.939/0.936 g/cc



Adhesive tape

Solution
Luban HP3104K

Polymer
PP (Homo)

Process
BOPP, MFR 3.3 g/10 min,
Density 0.91 g/cc



Jerry cans/Chemical shipping drums

Solution
Luban DMDZ-6147

Polymer
HDPE

Process
Blow Molding, MFR 9 (HLMI) g/10 min,
Density 0.948 g/cc



Crates

Solution
Luban DMDA-8007

Polymer
HDPE

Process
Injection Molding, MFR 8 g/10 min,
Density 0.965 g/cc



Liner bags

Solution
Luban DMDZ-6095/DGDZ-6097

Polymer
HDPE

Process
Blown Film, MFR 9 (HLMI) g/cc,
Density 0.952/9.948 g/cc



Carboy (drums up to 120 litres)

Solution
Luban DMDZ-6147

Polymer
HDPE

Process
Blow Molding, MFR 9 (HLMI) g/10 min,
Density 0.948 g/cc




Chemical bottles

Solution
Luban DMDD-6200

Polymer
HDPE

Process
Blow Molding, MFR 0.25 g/10 min,
Density 0.953 g/cc

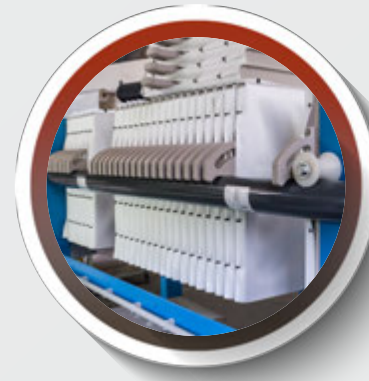

Filter plates

Solution
Luban EP6387U

Polymer
PP (ICF)

Process
Compression Molding, MFR 0.3 g/10 min,
Density 0.91 g/cc



HIC containers (higher ESCR)

Solution
Luban DMDD-6200

Polymer
HDPE

Process
Blow Molding, MFR 0.25 g/10 min,
Density 0.954 g/cc



Pails/Buckets

Solution
Luban EP2348R/EP2340P

Polymer
PP (ICF)

Process
Injection Molding, MFR 15/21 g/10 min,
Density 0.91 g/cc



FIBC

Solution
Luban HP1102LC

Polymer
PP (Homo)

Process
Raffia, MFR 5 g/10 min,
Density 0.91 g/cc




Loft water tanks

Solution
Luban DNDC-7150/DNDC-7152/LL-8446.21

Polymer
LLDPE

Process
Rotational Molding, MFR 3.5/5 g/10 min,
Density 0.939/0.936 g/cc

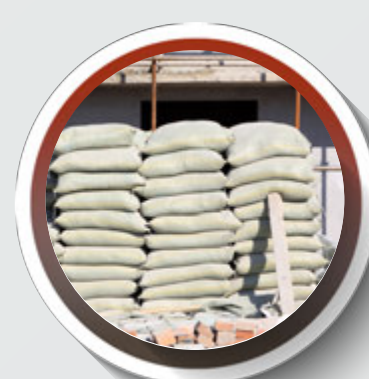


Cement bags

Solution
Luban HP1102K /HP1102LC

Polymer
PP (Homo)

Process
Raffia, MFR 3.4/5 g/10 min,
Density 0.91 g/cc

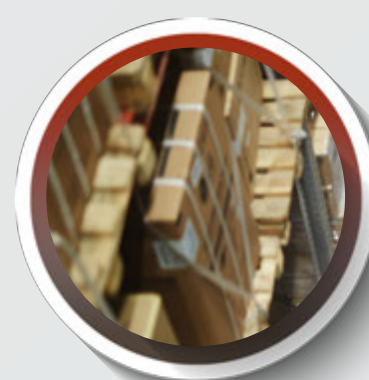

Box strappings

Solution
Luban HP1102K

Polymer
PP (Homo)

Process
Raffia, MFR 3.4 g/10 min,
Density 0.91 g/cc